



Small model with steel tip




| | | | | |
|-----------------|--|-----------|--------|-------|
| | | <i>in</i> | | |
| | | | 0 ÷ 25 | 0 ÷ 1 |
| 00530451 | | | | |

Horizontal scale

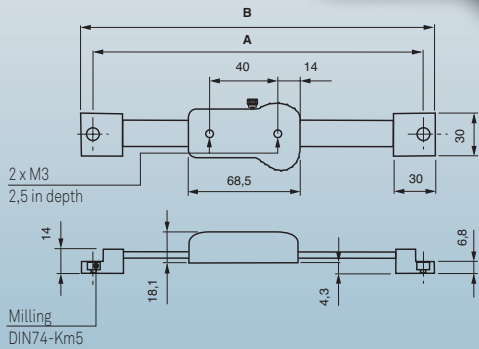

| | | | | | |
|-----------------|----------|-----------|--|------|------|
| | | <i>in</i> | | A mm | B mm |
| | | | | | |
| 00530471 | 0 ÷ 150 | 0 ÷ 6 | | 265 | 278 |
| 00530473 | 0 ÷ 300 | 0 ÷ 12 | | 415 | 428 |
| 00530474 | 0 ÷ 600 | 0 ÷ 24 | | 725 | 738 |
| 00530475 | 0 ÷ 1000 | 0 ÷ 40 | | 1135 | 1148 |

Accessories for electronic depth calipers

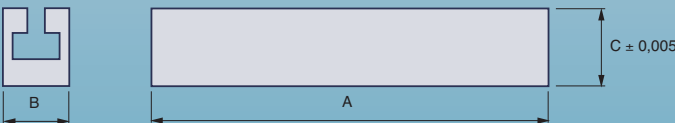

| | | | mm | | | | | |
|-----------------|----------------------------|--|------|------|------|---------|------|----|
| | | | A mm | B mm | C mm | | | |
| 00560103 | Removable base attachment | | 200 | 11,5 | 10 | ± 0,005 | 0,02 | 8 |
| 00560104 | Removable base attachment | | 300 | 16 | 16 | ± 0,005 | 0,02 | 10 |
| 00560105 | Removable base attachment | | 400 | 16 | 16 | ± 0,005 | 0,03 | 10 |
| 01961000 | 3V lithium caliper battery | | | | | | | |

Fixation system always delivered with removable base attachments

- ✓
- ISO 13385-1
- 0,01 mm / 0,0005 in
- LCD, 11 mm
- Floating zero
- Conversion mm / in
- ≤100 mm: 20 µm
>100 - ≤600: 30 µm
>600 - ≤1000: 40 µm
- 10 µm
- Scale with incremental divisions, inductive
- 2,5 m / s
- RS232, mono- and bi-directional
- Hardened stainless steel
- 3V lithium battery, CR 2032
- 12,000 hours
- Standby mode after 10 min, instrument retains zero. Automatic switch off after 2 hours, instrument retains zero in ABS mode, zero must be reset in DIFF mode
- 10°C à 60°C
- 10°C à 40°C
- 100%
- IP 67
- 1907/2006/CE
2004/108/CE
2002/96/CE
- Suited plastic case
- Inspection report with declaration of conformity
- Identification Number
- TWIN compatible