


## > TWIN CAL IP67



TWIN-CAL

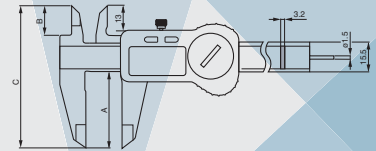

VALUELINE



ISO 13385-1



0,01 mm / 0,0005 in



LCD, 11 mm



Floating zero



Conversion mm / in



≤100 mm: 20 μm  
 >100 - ≤300: 30 μm



10 μm



Scale with incremental divisions, inductive TWIN-CAL capacitive VALUELINE



TWIN-CAL 2,5m/s  
 VALUELINE 1,6m/s



RS232, mono- and bi-directional (TWIN-CAL)



Hardened stainless steel



Pile Lithium 3V, CR 2032



12'000 hours



Standby mode after 10 min, instrument retains zero. Automatic switch off after 2 hours, instrument retains zero in ABS mode, zero must be reset in DIFF mode



-10°C à 60°C



10°C à 40°C



1907/2006/CE  
 2004/108/CE  
 2002/96/CE



Suited plastic case



Inspection report with declaration of conformity




Identification Number



TWIN compatible

00530319	0 ÷ 150	0 ÷ 6	—	40	16	74	■
00530320	0 ÷ 150	0 ÷ 6	—	40	16	74	●
00530321	0 ÷ 150	0 ÷ 6	●	40	16	74	●
00530322	0 ÷ 200	0 ÷ 8	●	50	20	90	■
00530323	0 ÷ 300	0 ÷ 12	●	64	22	106	■



## > TWIN CAL IP40

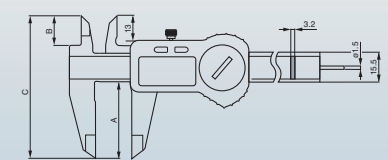

00530097	0 ÷ 150	0 ÷ 6	—	40	16	74	■
00530094	0 ÷ 150	0 ÷ 6	●	40	16	74	●
00530095	0 ÷ 200	0 ÷ 8	●	50	20	90	■
00530096	0 ÷ 300	0 ÷ 12	●	64	22	106	■

## > VALUELINE IP40

TESA ValueLine is a brand designed by TESA to meet the demands of clients who are not willing to compromise on TESA know-how and are looking for high quality affordable products. The Swiss technology at the heart of our products also provides additional quality assurance.

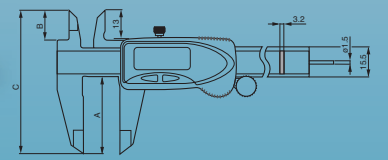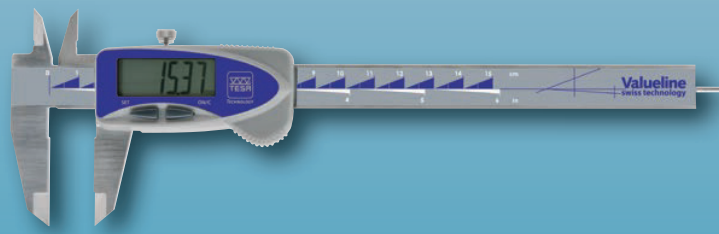

00539090	0 ÷ 150	0 ÷ 6	—	40	16	74	■
00539091	0 ÷ 150	0 ÷ 6	—	40	16	74	●
00539092	0 ÷ 200	0 ÷ 8	●	50	20	90	■
00539093	0 ÷ 300	0 ÷ 12	●	64	22	106	■