
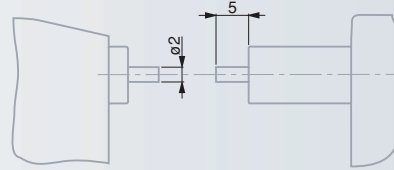


## MICRO-ETALON 225 Micrometers with a Dial Indicator

Feature a mobile anvil along with a built-in dial indicator – Ideal for comparative measurements on small part series – Nominal dimension is set on the micrometer while deviations are read on the dial indicator – Retractable anvil by means of a push-button – Rotating dial for fine adjustment, also with adjustable tolerance markers.

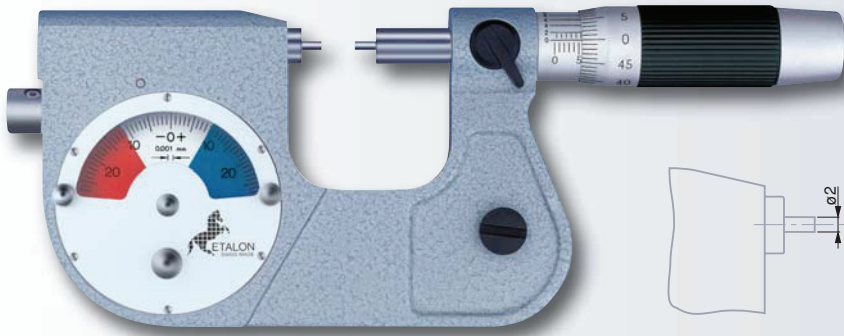

DIN 863 T3  
(Style D13)

Tungsten carbide  
tipped

6.5 mm dia.  
Model  
with small  
measuring faces:  
2 mm dia., 5 mm long.

0,5 mm

Anvil:  
4,5 to 5,5 N

Micrometer with  
vernier reading  
to 0,002 mm.  
Dial indicator: 0,001 mm.

Dial indicator:  
 $\pm 0,025$  mm

Micrometer:  
max. perm.  
error of 2  $\mu$ m.  
Dial indicator: 1  $\mu$ m.

Dial indicator:  
repeatability  
limit of 0,5  $\mu$ m.

Plastic case

Declaration  
of conformity

**Nº**

Dial indicators to 0,001 mm

072108669

072108691

Model with small measuring faces

072108722



mm

0 ÷ 25

25 ÷ 50

0 ÷ 20

## Protective Cover

Made in transparent plastic – Can be mounted on the bezel – Protects the indicator against dust particles and liquids – Prevents both tolerance markers from being accidentally displaced.

**Nº**

072110978

