
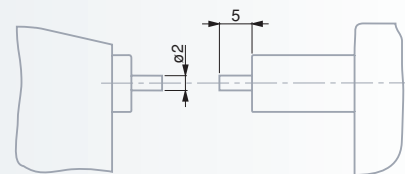


## ETALON MICROSPEL 280

These micrometers have a mobile anvil along with a 8 mm diameter clamping bore for mounting a sensor with linear action such as the TESA GT 21/22 electronic probe (also refer to section O).

Specially designed for batch inspection of small precision parts.

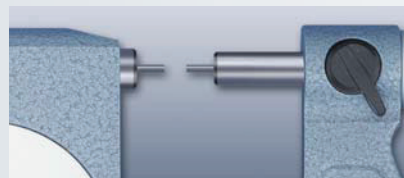

DIN 863 T3  
(Style D14)  
NF E 11-090

Vernier reading  
to 0,002 mm

Tungsten carbide  
tipped

6,5 mm dia.  
Models  
with small  
measuring faces:  
2 mm dia., 5 mm long.

0,5 mm

Anvil:  
2 up to 8 N,  
adjustable

Meas. element:  
max. perm. error  
of 2  $\mu$ m

Mobile anvil:  
repeatability  
limit of  
0,5  $\mu$ m.

Adjustable part  
support (except  
model with small  
measuring faces).

Plastic case

Declaration  
of conformity

No



mm

072110816 0 ÷ 25

Model with small measuring faces

072110853 0 ÷ 20

### Important

Electronic probe and micrometer stand  
are not part of the delivery scope and  
must be ordered separately.