


Micrometer Heads

Components commonly used for checking the various displacements on measuring fixtures, coordinate tables, microscopes, machines as well as other special appliances. Mounted on the cylindrical coupling shaft.

Models MICROMASTER


Without spindle lock.

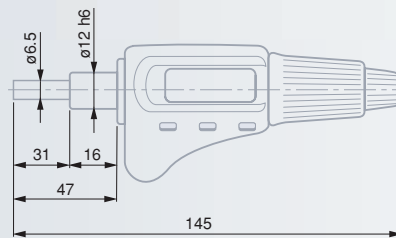

No	mm	
	mm	mm
06030038	0 ÷ 30	12h6
06030039	30 ÷ 0	12h6
06030040	30 ÷ 0	12h6

Model ISOMASTER AR

Without spindle lock.

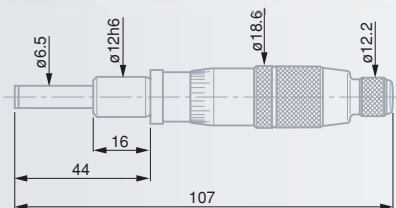

No	mm	
	mm	mm
00211201	0 ÷ 25	12h6



DIN 863 T2 (Style E)

0,001 mm
0,00005 in

Metric/Inch conversion

Tungsten carbide tipped

6,5 mm dia.

0,5 mm

Max. perm. error of 4 µm

Max. 10 N

Additional technical data on page C-3

RS 232 interface, opto-coupled

Identification number

Inspection report with a declaration of conformity



DIN 863 T2 (Style E)
NF E 11-090

0,01 mm

Tungsten carbide tipped

6,5 mm dia.

0,5 mm

Max. perm. error of 3 µm

Max. 10 N

Identification number

Declaration of conformity

