
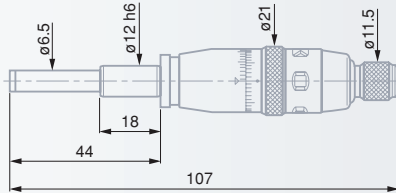


## Model TESAMASTER AR

Without spindle lock.

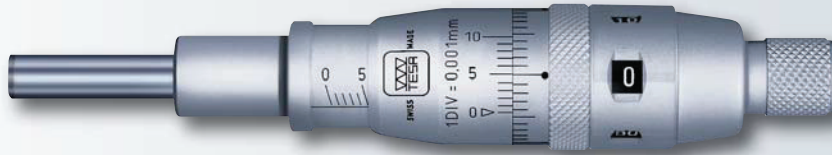


00312301	0 ÷ 25 mm	12h6 mm

- ✓
- DIN 863 T2 (Style E)
- Vernier reading to 0,001 mm
- Scale division to 0,1 mm
- Tungsten carbide tipped
- 6,5 mm dia
- 0,5 mm
- Max. perm. error of 2 µm
- Max. 10 N
- Identification number
- Declaration of conformity

## ETALON 266 Micrometer Heads

With or without spindle lock.

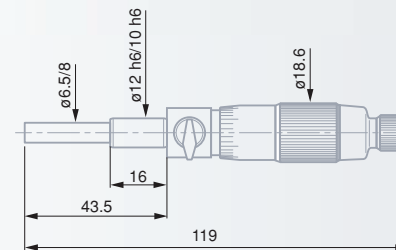

	mm	D mm	mm	Spindle lock
072115942	0 ÷ 25	Ø 6,5	12h6	—
072115943	0 ÷ 25	Ø 8	12h6	●
072116258	0 ÷ 25	Ø 6,5	10h6	●

- ✓
- DIN 863 T2 (Style E) NF E 11-090
- Vernier reading to 0,002 mm
- Tungsten carbide tipped
- 0,5 mm
- Max. perm. error of 3 µm
- Identification number
- Declaration of conformity