

Depth Micrometers

With interchangeable measuring rods provided in sets. The rods are adjusted in steps, each with a step length of 30 or 25 mm, thus eliminating the need for a new display setting when rods are exchanged.

Models MICROMASTER


Non-rotating measuring rod. Sets with a step length of 30 mm.



No	mm	in	mm
06030069	0 ÷ 90	0 ÷ 3.5	50 x 15
06030070	0 ÷ 180	0 ÷ 7	100 x 15
<i>Optional Accessories</i>			
06060021	6 pieces rod set	0 ÷ 180 mm	

Models ISOMASTER AQ

Measuring rods with a step length of 25 mm or 1 in.

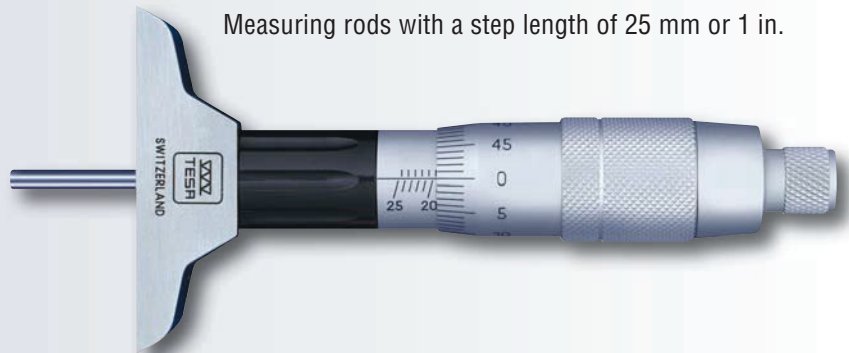

No	mm	mm
00211002	0 ÷ 75	50 x 15
00211003	0 ÷ 150	50 x 15
00211004	0 ÷ 75	100 x 15
00211005	0 ÷ 150	100 x 15



DIN 863 T2 (Style T)

0,001 mm
0.00005 in

Metric/Inch conversion

Non-rotating spindle

Measuring rods with hardened steel ends

3 mm dia. measuring rods

30 mm

RS 232 data output

0,5 mm

Max. perm. error (meas. element): 3 µm

Plastic case

Identification number

Inspection report with a declaration of conformity



DIN 863 T2 (Style T)
NFE 11-097

0,01 mm

Measuring rods with hardened steel ends

3 mm dia. measuring rods. Measuring face on the base: see table

0,5 mm

Max. perm. error of the measuring element: 3 µm

Plastic case

Identification number

Declaration of conformity