


Precision Dial Gauges

0,01 mm dial readout / 40 mm dial diameter

Remarkable for their robustness, these precision dial gauges are essential for the workshop.

- Smooth jewelled movement with rubies.
- Full-metal dial casing.
- Optimum protection against shocks.
- Swiss Made.

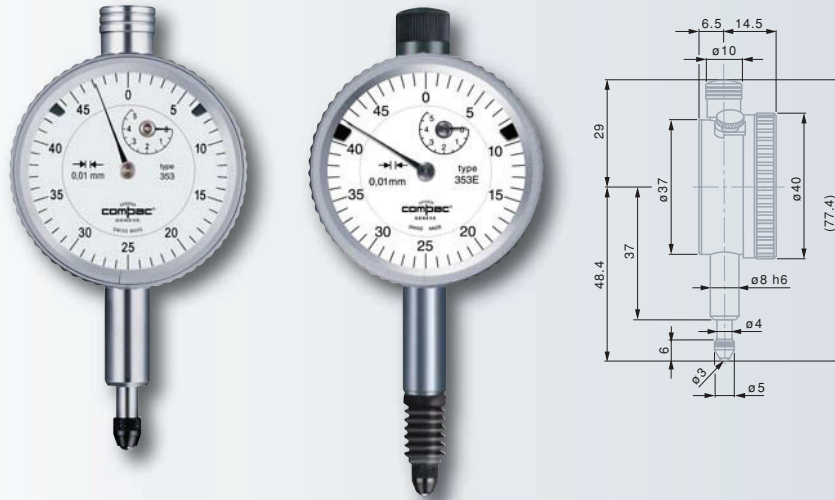

- ✓
- EN ISO 463 Factory standard
- 0,01 mm
- 2,2 mm
- Rotating dial
- Full-metal dial casing. Stainless steel fixing shank and plunger, hardened.
- Adjustable tolerance marks. M2,5 mounting thread for the measuring insert.
- 3 mm dia. ball tip, already mounted
- Cardboard box
- Identification number
- Inspection report with a declaration of conformity

<i>COMPAC dial gauge</i>							
353		0,01	5	5,4	●	–	0 ÷ 25 ÷ 50
<i>COMPAC IP54 dial gauge, protected against the penetration of liquids</i>							
353E		0,01	5	5,4	●	–	0 ÷ 25 ÷ 50
<i>COMPAC dial gauge with limited reading range</i>							
353S		0,01	±0,2	3,3	●	–	20 ÷ 0 ÷ 20

Permissible limits of a metrological characteristic (MPE/MPL)

	± 0,2 mm	5 mm
	7 µm	12 µm
	5 µm	6 µm
	9 µm	14 µm
	3 µm	3 µm
	3 µm	3 µm
	≤ 1,4 N	≤ 1,4 N
– Model IP54	–	≤ 2 N