



Precision Dial Gauges

0,001 mm dial readout / 58 mm dial diameter

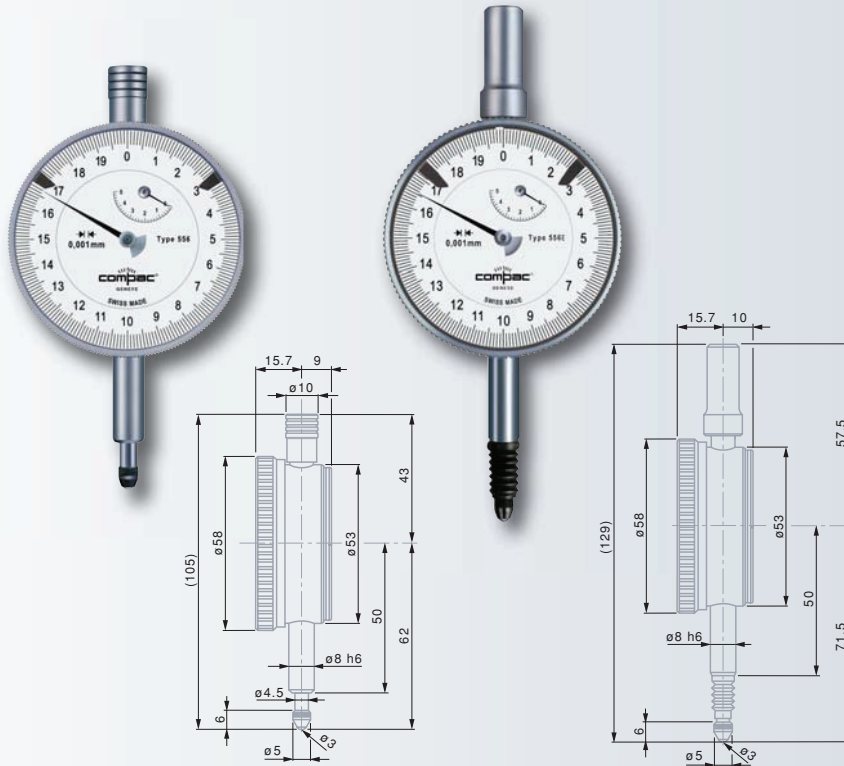

- ✓
- EN ISO 463
Factory standard
- 0,001 mm
- 1,5 mm
- Rotating dial
- Full-metal dial casing.
Stainless steel fixing shank and plunger, hardened.
- Adjustable tolerance marks. M2,5 mounting thread for the measuring insert.
- 3 mm dia. ball tip, already mounted.
- Cardboard box
- Identification number
- Inspection report with a declaration of conformity



COMPAC dial gauges

556	0,001	5	5,3	●	–	0,2	0 ÷ 10 ÷ 20
567	0,001	1	3,3	●	–	0,1	0 ÷ 5 ÷ 10

COMPAC dial gauges IP54, protected against the penetration of liquids

556E	0,001	5	5,3	●	–	0,2	0 ÷ 10 ÷ 20
567E	0,001	1	3,3	●	–	0,1	0 ÷ 5 ÷ 10

Permissible limits of a metrological characteristic (MPE/MPL)

	1 mm	5 mm
Deviation span	4 µm	12 µm
Total deviation span	5 µm	14 µm
Repeatability limit	1 µm	2 µm
Max. hysteresis	1 µm	2 µm
Measuring force – Models IP54	≤ 1,5 N ≤ 1,7 N	≤ 1,5 N ≤ 1,7 N